


The Rickrak Quick Attach system works on both the original Harley luggage rack or the Air Wing Harley Luggage rack. We have provided two different rubber horse shoe shaped grommet protectors. These protectors slip on over the "feet". Be sure to push the protectors completely on. Match up the correct rubber grommet feet with the correct Luggage rack as shown below



Instructions for attaching your tour bag to the Rickrak Strapless Quick Attach Rack

Here is an exploded view of assembly

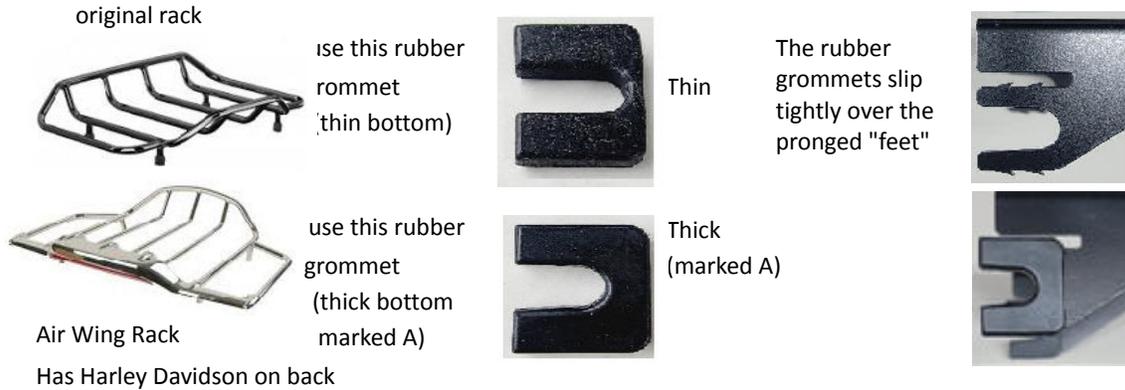

We have supplied 6 sets of bolts, washers, and lock nuts. Smaller bags may only require the use of 4 sets. After deciding on which holes in the Rickrak Quick Attach are the best locations to use for your particular tour bag, mark, then drill, pierce, or punch corresponding holes in bottom of your tour bag. If your tour bag has a zippered lining, this would allow you to place the bolt, large rubber washer and fender washer hidden beneath the lining. We recommend using a 3/16" to 5/16" hollow hole punch. This punch is available from Rickrak. \$9.95



Hex Wrench

Tools required for RickRak installation: 7/16" Socket

Anti-Seize to place in nut and bolt thread - supplied

1/4" Drill or Punch